


Instructions for use of chutes

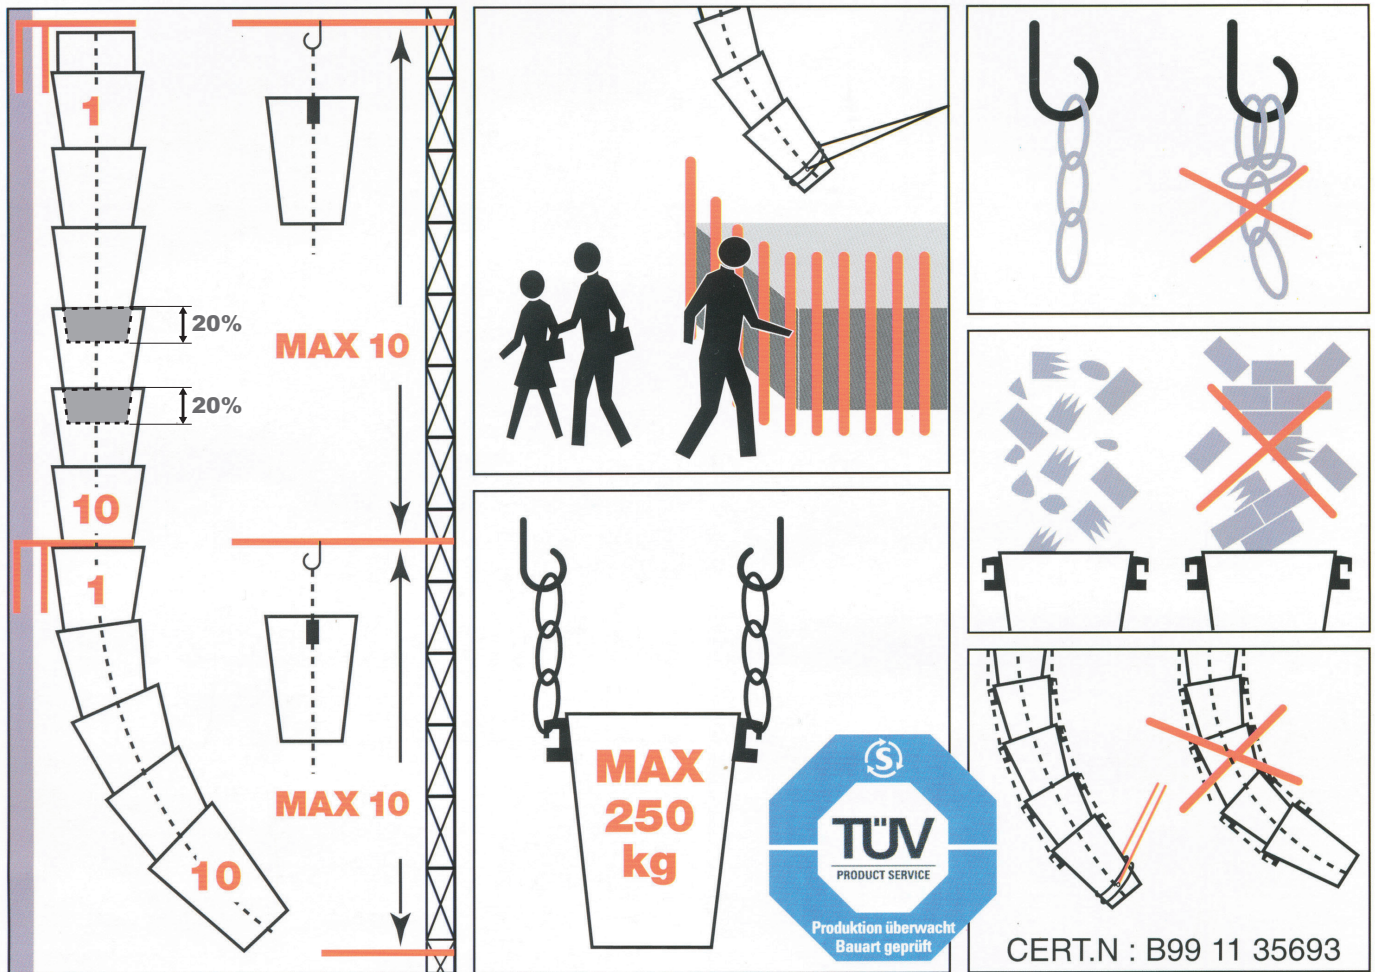

- Fit a starter frame and a starter chute every 10 chutes.
- Hook the carabiners correctly from one chute to the other, insert the chutes 20% one inside the other
- The weight of the column of chutes shall not exceed 250 kg.
- The column must not form sharp corners.
- Bend the end of the column to relieve the fall of the debris.
- Hook the last chute so that it does not come into contact with the debris unloaded.
- Reduce litter into small pieces.
- Determine and secure the work area.
- Change the position of the column regularly to ensure uniform wear.
- If necessary, ground the column of chutes.
- Every day, before starting work, check the correct condition of all hooks, carabiners, bolts and chains. Immediately change any used parts